



Kemia

For Building Products

DESCRIPTION

KEMIPLAST membrane is made up of distilled bitumen with plastomeric & elastomeric polymers added making it resistance to high and low temperatures and increased durability.

KEMIPLAST membrane is reinforced with non-woven polyester composite with fiber glass mat that provides the membrane with its particular tensile strength, tear resistance, puncture resistance and elongation properties.

FINISH SURFACE

The membrane can be covered with polyethylene (P.E), Sand or Mineral.

USES

- Roofing or re-roofing works for sloped and flat protected roofs.
- Waterproofing of wet areas, mechanical rooms and terraces.
- Waterproofing of underground structures.

For any further information contact the technical office in KEMIA for building products

HOW TO USE


- Surface should be smooth, dry and clean.
- Skirting wall by 7cm * 7cm screed cement between vertical and horizontal (if founded).
- Applying primer of cold bituminous primer **BITUBLAST WB**
- The membrane is applied by torching it with alight propane gas fully bonded.
- Overlaps between rolls not less than 10cm sidlaps & 15cm staggered end laps.

RECOMMENDATION

- The Membrane (P.E and Sand finish) must be covered to protective from UV rays.

STORAGE

Keep the rolls in vertical position and away from UV rays.

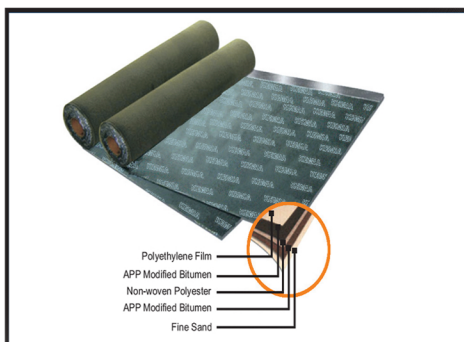

Sales Office : 6th October City - Central Road
3th District -First Phase - Build No 79
Tel: (+202) 38872423
Factory : Alex Cairo Road KM 110 - Wady Al-Natron
Email: Info@Kemia-KFBP.com
Sales Number: 01041116711

الإدارة و المبيعات : مدينة 6 أكتوبر - المحور المركزي
الحي الثالث - المجاورة الأولى - عمارة 79

الأدارة و المبيعات : 01041116711 (+20)

المصنع : طريق الأسكندرية القاهرة الصحراوي
الكيلو 110 - وادي النطرون

التليفون و الفاكس : 3551009-3551008 (+2045)